


Yoke® Trawl Blocks

Manufactured with the highest quality steel available. Corrosion resistant, particularly in a salt water environment. Sealed bearings for increased life span and performance.


Test certificates available on request.

Applications: Marine and fishing industry


► Trawl Blocks with Swivel Eye

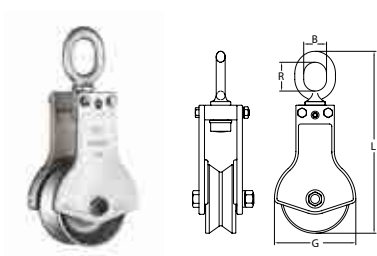

Part No.	WLL (tonnes)	Sheave Diameter (inch)	Sheave width	B (mm)	R (mm)	G (mm)	L (mm)	N.W (Kg)
Needle type								
46732	5	6	2 3/4	50	63	178	398	11.9

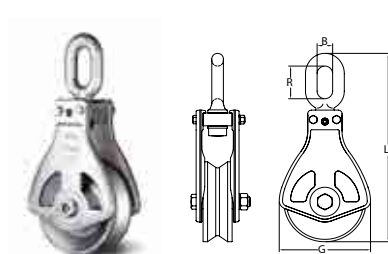

Part No.	WLL (tonnes)	Sheave Diameter (inch)	Sheave width	B (mm)	R (mm)	G (mm)	L (mm)	N.W (Kg)
Tapered type								
46741	10	8	2 7/8	38	82	223	474	19.7

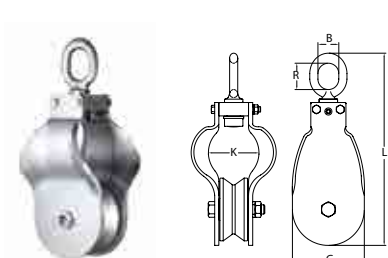


Part No.	WLL (tonnes)	Sheave Diameter (inch)	Sheave width	B (mm)	R (mm)	G (mm)	L (mm)	N.W (Kg)
Bronze bushed								
46736	5	6	2 3/4	50	63	172	460	14.2

PWB[®] Manual Sheaves

Fully interchangeable sheaves.

Applications: For use with manila and wire rope

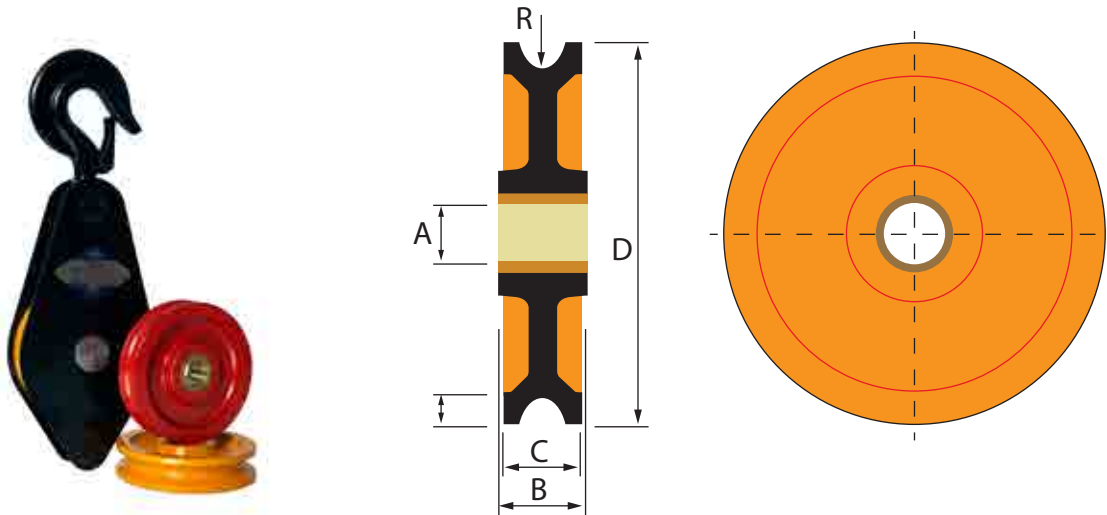

➤ Manila Rope Sheaves - Red Enamel Finish



Sheave Dia. D (mm)	Part No.	A (mm)	B (mm)	C (mm)	E (mm)	Rope dia. R (mm)
63	45588	12.5	20.5	19.5	3.2	10
75	45590	12.5	20.5	19.5	4.8	12
100	45594	19	24.5	23	6.4	16
125	45598	22	29.5	27	7.1	20
150	45600	25	32	30	8	24
200	45604	35	46	44	11	32

➤ Wire Rope Sheaves - Yellow Enamel Finish



Sheave Dia. D (mm)	Part No.	A (mm)	B (mm)	C (mm)	E (mm)	Rope dia. R (mm)
63	45589	12.5	20.5	19.5	4.8	5
75	45591	12.5	20.5	19.5	6.4	6
100	45595	19	24.5	23	8	8
125	45599	22	29.5	27	11	10
150	45601	25	32	30	12.7	12
200	45605	35	46	44	16	16

PWB® Manually Operated Sheave Blocks

► Single Sheave Block

- Fully interchangeable sheaves .
- Supplied with either drop forged swivel hooks or swivel eyes.
- Becketts are standard on all single and double blocks.
- Bronze bushes and safety latches are standard across the range.

Applications: Block and tackle, general pulling

Australian Standard: AS 2089



Sheave dia (mm)	63	75	100	125	150	200
Capacity	250kg	250kg	500kg	1t	1t	2t
Manilla Rope dia (mm)	10	12	16	20	24	32
Hook Suspended - Part No	45621	45638	45671	45705	45722	45756
Eye Suspended - Part No	45613	45630	45663	45697	45714	45748
Wire Rope dia. (mm)	5	6	8	10	12	16
Hook Suspended - Part No	45624	45641	45674	45708	45725	45759
Eye Suspended - Part No	45616	45633	45666	45700	45717	45751

► Double Sheave Block

- Fully interchangeable sheaves .
- Supplied with either drop forged swivel hooks or eyes.
- Becketts are standard on all single and double blocks.
- Bronze bushes and safety latches are also standard across the range.

Applications: Block and tackle, general pulling

Australian Standard: AS 2089



Sheave dia (mm)	63	75	100	125	150	200
Capacity	250kg	250kg	750kg	1t	1t	2t
Manilla Rope dia (mm)	10	12	16	20	24	32
Hook Suspended - Part No	45619	45636	45669	45703	45720	-
Eye Suspended - Part No	45611	45628	45661	45695	45712	45746
Wire Rope dia. (mm)	5	6	8	10	12	16
Hook Suspended - Part No	45620	45637	45670	45704	45721	45755
Eye Suspended - Part No	45612	45629	45662	45696	45713	45747

PWB® Manually Operated **Sheave Blocks**

► Treble Sheave Block

- Fully interchangeable sheaves .
- Supplied with either drop forged swivel hooks or swivel eyes.
- Becketts are standard on all single, double and treble blocks.
- Bronze bushes and safety latches are also standard across the range.

Applications: Block and tackle, general pulling

Australian Standard: AS 2089



Sheave dia (mm)	63	75	100	125	150	200
Capacity	250kg	250kg	750kg	1t	1t	2t
Manilla Rope dia (mm)	10	12	16	20	24	32
Hook Suspended - Part No	45625	45642	45675	45709	45726	-
Eye Suspended - Part No	-	45634	45667	45701	45718	-
Wire Rope dia. (mm)	5	6	8	10	12	16
Hook Suspended - Part No	45626	45643	45676	45710	45727	45761
Eye Suspended - Part No	-	45635	45668	45702	45719	-

► Snatch Block

- Fully interchangeable sheaves .
- Supplied with either drop forged swivel hooks or swivel eyes.
- Becketts are standard on all single and double blocks.
- Bronze bushes and safety latches are also standard across the range.

Applications: Block and tackle, general pulling

Australian Standard: AS 2089




Sheave dia (mm)	63	75	100	125	150	200
Capacity	250kg	250kg	750kg	1t	1t	2t
Manilla Rope dia (mm)	10	12	16	20	24	32
Hook Suspended - Part No	45622	45639	45672	45706	45723	45757
Eye Suspended - Part No	45614	45631	45664	45698	45715	45749
Wire Rope dia. (mm)	5	6	8	10	12	16
Hook Suspended - Part No	45623	45640	45673	45707	45724	45758
Eye Suspended - Part No	45615	45632	45665	45699	45716	45750

Yoke® Snatch Blocks

► Snatch Block with Shackle

- Manufactured from high tensile steel.
- Available in sizes 2 tonne to 20 tonne capacity.
- Suitable for wire rope sizes 5/16" (8mm) to 1-1/8" (29mm).
- Supplied with test certificates.
- Sheaves complete with bronze bush and greased fitting for ease of operation.

Applications: Block and tackle, general pulling

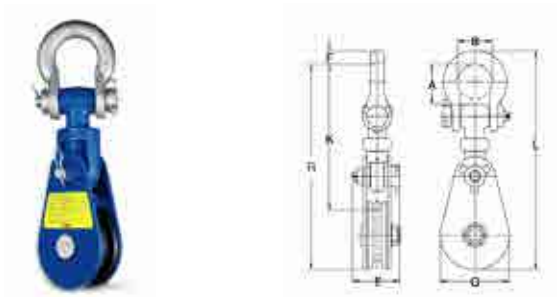

Part No.	WLL 4:1 (tonnes)	Sheave Dia. (mm)	Wire Rope Size (mm)	Replacement Sheaves	A (mm)	B (mm)	K (mm)	R (mm)	E (mm)	F (mm)	G (mm)	L (mm)	N.W (kg)
40900	2.0	75	8-10	40889	35	30	150	217	64	11	75	228	2.0
40901	4.0	115	10-13	40890	64	50	243	337	79	19	107	356	5.9
40902	8.0	150	16-19	40891	87	76	320	452	104	32	152	484	13.0
40903	8.0	200	16-19	40982	87	76	333	526	104	32	220	558	19.5
40904	12.0	150	19-22	40893	78	80	359	496	134	44	167	540	24.3
40905	15.0	200	19-22	40894	78	80	355	545	134	44	220	589	29.6
40906	15.0	250	19-22	40895	78	80	423	670	134	44	280	714	43.0
40907	15.0	300	19-22	40896	78	80	428	726	134	44	330	770	53.5
40908	20.0	200	25-29	40897	109	93	433	616	150	55	216	671	41.2
40909	20.0	250	25-29	40898	109	93	481	723	150	55	280	778	54.0
40910	20.0	300	25-29	40899	109	93	485	778	150	55	330	833	62.5